



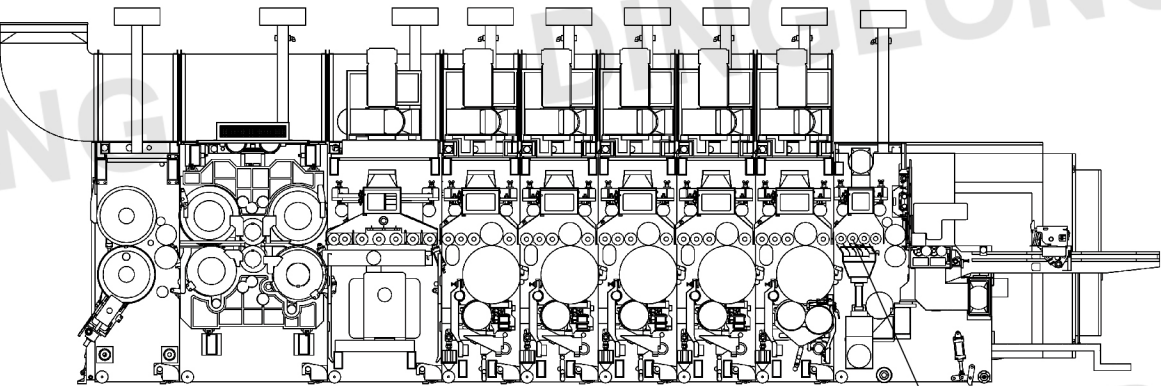

主要技术参数/SPECIFICATIONS

型号/Model		SNOVA-BP		SNOVA-BP		
		1224	1228	1628	1632	1636
机械最高速度 (张/分) Max.machine speed(sheets/min)		250	220	180	180	150
最大进纸尺寸 (LX W mm) Max.feeding size		1200X2400	1200X2800	1600X2800	1600X3200	1600X3600
隔张送纸尺寸 (LX W mm) Skip feeding size		1500X2400	1500X2800	2000X2800	2000X3200	2000X3600
最大印刷面积 (mm) Max.printing area		1150X2350	1150X2750	1550X2750	1550X3150	1550X3550
最小进纸尺寸 (LX W mm) Min.feeding size		350X690		450X690		
标准印版厚度 (mm) Printing plate thickness		7.2				
最小开槽间距 (mm) Min.slotting interval	正刀 AXB Normal	160X160				
	反刀 AXB Reverse	250X70				

*产品参数变动和机构改良，恕不另行通知
Subject to change and improvement without notice

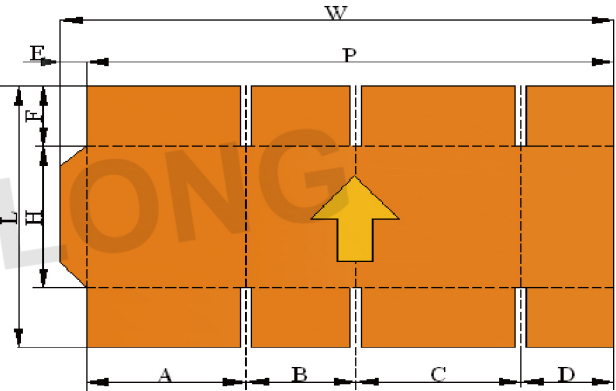

BP1600型图示

送纸部加宽可选



上海鼎龙机械有限公司
SHANGHAI DINGLONG MACHINERY CO.,LTD.

地 址：上海市奉贤区南桥镇奉秀路501号
邮 编：201499
电 话：021-67180698 67186238 传 真：021-67182178
Http: //www.shdljx.com
E-mail: dinglong@shdljx.com

SNOVA-BP
赛诺威 吸附下印式
自动高速印刷开槽模切机



上海鼎龙机械有限公司
SHANGHAI DINGLONG MACHINERY CO.,LTD.